
Hanger Loading Table 6 in. (152mm) Maximum Diameter Pipe		
Sprinkler Pipe	Maximum Allowable Hanger	Threaded Rod
Diameter in. (mm)	Load Ibs. (kN)	Dia. in. (mm)
6 (152)	2620 (11.65)	1/2 (13)

* Allowable hanger loads based on maximum hanger spacing. (see note 8)



(2)600S162-43 grade 50 trapeze member. Space at-15ft (4572mm) <u>maximum</u>. Each end to extend 1/4" (6mm) minimum beyond truss chord.

ASTM A307 threaded rod with washer and nut positioned between tube web stiffeners (see hanger rod assembly detail, this sheet) See hanger loading table for size.

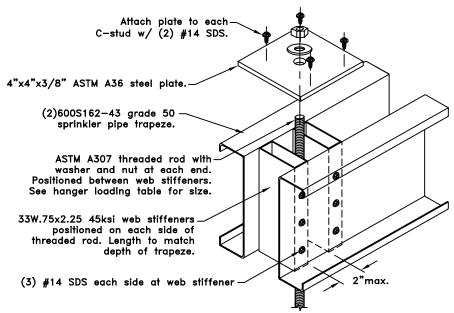


Hanger Rod Assembly Detail

Note: Multiply above units by 25.4 for millimeters.

1. SDS = self-drilling tapping screw. Screw spacing, end and edge distance is 3/4" (19mm) min.

- 2. The minimum yield strengths of materials are as follows (unless otherwise noted): C—Stud Trapeze = 33ksi, Tube steel support posts = 45ksi, TrusSteel Chords = 55ksi.
- 3. This detail is only for the design of the sprinkler pipe hanger. Contact a TrusSteel engineer for the proper truss loading procedures.
- 4. It is the responsibility of the architect or engineer of record to review this hanger design to verify it conforms with the overall sprinkler system support design.
- Allowable hanger load determined from the National Fire Protection Association NFPA13 1999 titled "Installation of Sprinkler Systems".
- 6. Maximum sprinkler pipe size that can be supported by this detail is 6" (152mm) in diameter.
- 7. Pipe weight determined using schedule 40 steel pipe.
- Pipe hanger spacing not to exceed 12' (3658mm) for pipes up to and including 1-1/4" (32mm) diameter and 15' (4572mm) for pipes greater than 1-1/4" (32mm) diameter per NFPA13 1999.
- 9. Vertical truss web may be used as trapeze support post provided it is designed to carry additional sprinkler loads per proper truss loading procedures.

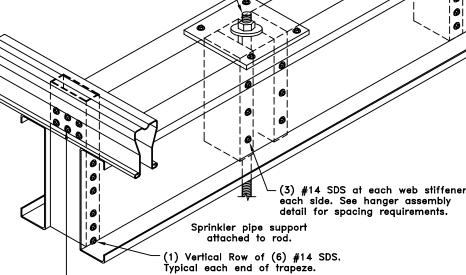

TrusSteel® Division of ITW Building Components Group, Inc.

-(6) #14 SDS each side of Truss chord.

Note: Hanger rod assembly may be placed anywhere along the trapeze.

Typical each end of trapeze.


www.TrusSteel.com

Florida: 1950 Marley Drive / Haines City, FL 33844 / (800) 755-6001 Missouri: 13389 Lakefront Drive / Earth City, MO 63045 / (800) 326-4102 California: 8351 Rovana Circle / Sacramento, CA 95828 / (800) 877-3678 Double C-Stud Sprinkler Trapeze at TSC2.75 Top Chord for 6" (152mm) Max. Diameter Pipe

0

General Notes:

ITW Building Components Group, Inc. shall not be responsible for any performance failure in a connection due to a deviation from this detail. Any variation from this detail shall be approved in advance by ITW Building Components Group, Inc.



Standard Detail: TS049J

Date:

06/04/07

TrusSteel Detail Category:

Top Chord Sprinkler Hanger